





Learn more about
this product




Your Gateway to Efficient Connectivity

With a standard 9-pin DSUB at one end and a 16-pin OBD II connector at the other, this 30 cm cable connects the Kvaser Leaf v3 or any CAN interface to any vehicle with an OBD II port. Kvaser's adapter cables have a ruggedised construction that meets demanding use cases. An in-house designed compact OBD II connector attaches to the cable with extra strong strain relief, allowing the cable to bend easily to 90 degrees.

 **Warranty**
2-Year warranty. See our general conditions and policies for details.

 **Support**
Free support for all products by contacting support@kvaser.com

 **EAN**
73-30130-01391-9

Major Features

- Standard 9-pin DSUB connector
- OBD II Type B connector
- 300 mm (0.98 ft) long cable made of durable thermoplastic rubber.
- Compatible with J1939, CANopen, NMEA 2000® and DeviceNet. Higher layer protocol translation handled by the user's application. For software support please see our Technical Associates products and our Software Download page (www.kvaser.com).

Support


Documentation, Kvaser CANlib SDK and drivers can be downloaded for free at www.kvaser.com/downloads.

Kvaser CANlib SDK is a free resource that includes everything you need to develop software for the Kvaser CAN interfaces. Includes full documentation and many program samples, written in C, C++, C#, Delphi, Visual Basic, Python and t programming language.

Kvaser CAN hardware is built around the same common software API. Applications developed using one device type will run without modification on other device types.

Technical Data

CAN Channels	1
Certificates	CE, RoHS
Connector	ODB II Type B DSUB9 socket
Length	300 mm
Material	Durable thermoplastic rubber
Operating Temperature Range	-40 to +85 °C
Strain Relief	Reinforced
Weight	76 g

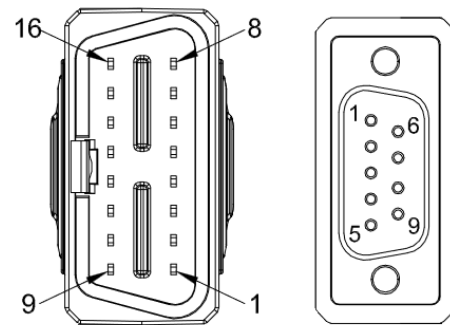

OBD II-Type B	Signal Name	DSUB9
4	GND	3
16	V+	9
6	CAN_H	7
14	CAN_L	2
	SHIELD	5+Shell