





Learn more about  
this product



## Your Gateway to Efficient Connectivity

With a standard 9-pin DSUB at one end and a 9-pin J1939-13 Type II compliant CAN connector at the other, this 30 cm cable connects the Kvaser Leaf v3 or any CAN interface to a heavy-duty vehicle. Kvaser's adapter cables have an IP67-rated, ruggedised construction that meets demanding use cases. An in-house designed compact J1939-13 connector attaches to the cable with extra strong strain relief, allowing the cable to bend easily to 90 degrees.

 **Warranty**  
2-Year warranty. See our general conditions and policies for details.

 **Support**  
Free support for all products by contacting [support@kvaser.com](mailto:support@kvaser.com)

 **EAN**  
73-30130-01392-6

# Kvaser J1939-13 Type II DSUB9 Adapter 30 cm

## Major Features

- Standard 9-pin DSUB connector
- M12 5-pin A-code connector
- 300 mm (0.98 ft) long cable made of durable thermoplastic rubber.

## Support

At Kvaser, we are committed to providing exceptional support for all our accessories, including cables, SD cards, and mounting brackets. Our dedicated support team is here to assist you with any inquiries or issues you may encounter. Whether you need help with installation, troubleshooting, or compatibility questions, we are here to ensure you have a seamless experience with our products.

### Contact Us:


Technical Support: For technical assistance, please reach out to our knowledgeable support team at [support@kvaser.com](mailto:support@kvaser.com)

Documentation and Resources: Access detailed manuals, FAQs, and troubleshooting guides on our website at [www.kvaser.com/support](http://www.kvaser.com/support)

Warranty and Repairs: For warranty information and repair services, please visit [www.kvaser.com/warranty](http://www.kvaser.com/warranty)

## Technical Data

<b>CAN Channels</b>	1
<b>Connector</b>	J1939-13 Type II DSUB9 socket
<b>Length</b>	300 mm
<b>Material</b>	Durable thermoplastic rubber
<b>Operating Temperature Range</b>	-40 to +85 °C
<b>Regulatory Compliance</b>	CE
<b>Strain Relief</b>	Reinforced
<b>Weight</b>	103 g

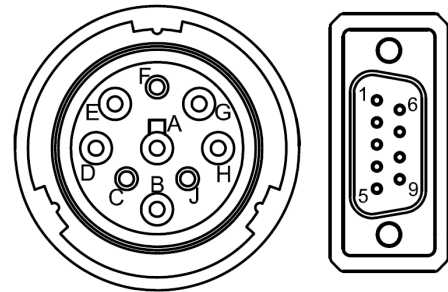

J1939-13 Type II	Signal Name	DSUB9
A	GND	3
B	V+	9
C	CAN_H	7
D	CAN_L	2
E	SHIELD	5+ Shell