



Learn more about  
this product



## Your Gateway to Efficient Connectivity

Adapter cable with a D-SUB 9 socket connector at one end and an OBD-II (J1962) Type B connector for 24V operation at the other. The OBD-II connector provides access to the on-board diagnostic port, typically located below the steering wheel in cars, and is also used in some trucks and buses. This halogen-free, flame-retardant CAN-bus cable is designed to connect a Kvaser CAN interface or data logger for collecting CAN/OBD-II data.

-  **Warranty**  
2-Year warranty. See our general conditions and policies for details.
-  **Support**  
Free support for all products by contacting [support@kvaser.com](mailto:support@kvaser.com)
-  **EAN**  
73-30130-01407-7

# Kvaser OBD-II to D-SUB 9 Adapter Cable 2.5 m

## Major Features

- Molded OBD-II (SAE J1962) Type B plug connector that can be connected to both OBD-II receptacle Type B and Type A.
- Molded 9 pin D-SUB socket connector with thumbscrews.
- 2500 mm (approx. 8 ft) long cable made of durable thermoplastic rubber.
- Perfect for Kvaser Memorator, Kvaser Leaf Professional, etc.
- Compatible with J1939, CANopen, NMEA 2000® and DeviceNet. Higher layer protocol translation handled by the user's application. For software support please see our Technical Associates products and our Software Download page ([www.kvaser.com](http://www.kvaser.com)).

## Support


Documentation, Kvaser SDK and drivers can be downloaded for free at [www.kvaser.com/downloads](http://www.kvaser.com/downloads).

Kvaser SDK is a free resource that includes everything you need to develop software for the Kvaser CAN interfaces. Includes full documentation and many program samples, written in C, C++, C#, Delphi, Visual Basic, Python and t programming language.

Kvaser CAN hardware is built around the same common software API. Applications developed using one device type will run without modification on other device types.

## Technical Data

<b>CAN Channels</b>	1
<b>Certificates</b>	CE, RoHS
<b>Connector</b>	ODB-II Type B D-SUB 9 socket
<b>Length</b>	2500 mm
<b>Material</b>	Thermoplastic polyurethane
<b>Operating Temperature Range</b>	-40 to +85 °C
<b>Strain Relief</b>	Reinforced
<b>Weight</b>	170 g

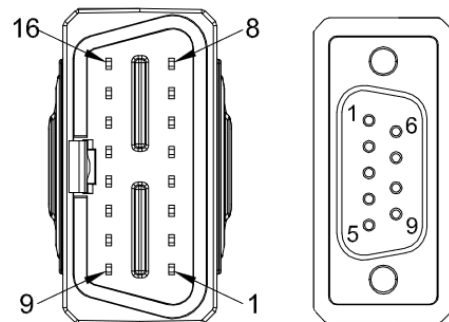

OBD-II Type B	Signal Name	D-SUB 9
4	GND	3
16	V+	9
6	CAN_H	7
14	CAN_L	2