





Learn more about  
this product




## Your Gateway to Efficient Connectivity

Adapter cable with a D-SUB 9 socket connector at one end and an OBD-II (J1962) Type B connector for 24V operation at the other. The OBD-II connector provides access to the on-board diagnostic port, typically located below the steering wheel in cars, and is also used in some trucks and buses. This halogen-free, flame-retardant CAN-bus cable is designed to connect a Kvaser CAN interface or data logger for collecting CAN/OBD-II data.

 **Warranty**  
2-Year warranty. See our general conditions and policies for details.

 **Support**  
Free support for all products by contacting [support@kvaser.com](mailto:support@kvaser.com)

 **EAN**  
73-30130-01407-7

# Kvaser OBD-II to D-SUB 9 Adapter Cable 2.5 m

## Major Features

- Molded OBD-II (SAE J1962) Type B plug connector that can be connected to both OBD-II receptacle Type B and Type A.
- Molded 9 pin D-SUB socket connector with thumbscrews.
- 2500 mm (approx. 8 ft) long cable made of durable thermoplastic rubber.
- Perfect for Kvaser Memorator, Kvaser Leaf Professional, etc.
- Compatible with J1939, CANopen, NMEA 2000® and DeviceNet. Higher layer protocol translation handled by the user's application. For software support please see our Technical Associates products and our Software Download page ([www.kvaser.com](http://www.kvaser.com)).

## Support


Documentation, Kvaser SDK and drivers can be downloaded for free at [www.kvaser.com/downloads](http://www.kvaser.com/downloads).

Kvaser SDK is a free resource that includes everything you need to develop software for the Kvaser CAN interfaces. Includes full documentation and many program samples, written in C, C++, C#, Delphi, Visual Basic, Python and t programming language.

Kvaser CAN hardware is built around the same common software API. Applications developed using one device type will run without modification on other device types.

## Technical Data

|                                    |                                 |
|------------------------------------|---------------------------------|
| <b>CAN Channels</b>                | 1                               |
| <b>Certificates</b>                | CE, RoHS                        |
| <b>Connector</b>                   | OBD-II Type B<br>D-SUB 9 socket |
| <b>Length</b>                      | 2500 mm                         |
| <b>Material</b>                    | Thermoplastic polyurethane      |
| <b>Operating Temperature Range</b> | -40 to +85 °C                   |
| <b>Strain Relief</b>               | Reinforced                      |
| <b>Weight</b>                      | 170 g                           |

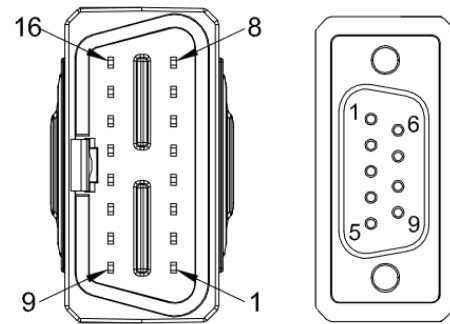

| OBD-II Type B | Signal Name | D-SUB 9 |
|---------------|-------------|---------|
| 4             | GND         | 3       |
| 16            | V+          | 9       |
| 6             | CAN_H       | 7       |
| 14            | CAN_L       | 2       |